

# NONPROVISIONAL PATENT APPLICATION

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

OLIFF & BERRIDGE, PLC  
P.O. Box 19928  
Alexandria, Virginia 22320  
Telephone: (703) 836-6400  
Facsimile: (703) 836-2787

Attorney Docket No.: 106774

Date: July 17, 2000

### BOX PATENT APPLICATION

### NONPROVISIONAL APPLICATION TRANSMITTAL RULE §1.53(b)

Director of the U.S. Patent and Trademark Office  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): MOTOR

By (Inventors): Kyoji KATO

- ☒ Formal drawings (Figs. 1-3; 3 sheets) are attached.
- ☒ A Declaration and Power of Attorney is filed herewith.
- ☒ An assignment of the invention to MINEBEA CO., LTD. is filed herewith.
- ☐ An Information Disclosure Statement is filed herewith.
- ☐ A statement to establish small entity status under 37 C.F.R. §§1.9 and 1.27 is filed herewith.
- ☐ A Preliminary Amendment is filed herewith.
- ☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. \_\_\_\_\_, filed \_\_\_\_\_.
- ☒ Priority of foreign application(s) No. 2000-072127 filed March 15, 2000 in Japan is claimed (35 U.S.C. §119).
- ☐ A certified copy of the above corresponding foreign application(s) is filed herewith.
- ☒ The filing fee is calculated below:

#### CLAIMS IN THE APPLICATION AFTER ENTRY OF ANY PRELIMINARY AMENDMENT NOTED ABOVE

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	3 - 20	= 0*
INDEP CLAIMS	1 - 3	= 0*
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

\* If the difference is less than zero, enter "0".

#### SMALL ENTITY

RATE	FEE
	\$ 345
x 9 =	\$
x 39 =	\$
+130 =	\$
TOTAL	\$

OR

OR

OR

OR

OR

OR

#### OTHER THAN A SMALL ENTITY

RATE	FEE
	\$ 690
x 18	\$-----
x 78	\$-----
+260	\$-----
TOTAL	\$690

- ☒ Check No. 110293 in the amount of \$690.00 to cover the filing fee is attached. Except as otherwise noted herein, the Director is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.
- ☐ This application is entitled to small entity status. DO NOT charge large entity fees to our Deposit Account.

Respectfully submitted,

*Thomas J. Pardini*

James A. Oliff  
Registration No. 27,075

Thomas J. Pardini  
Registration No. 30,411

JAO:TJP/cmm

### **Inventor Information**

Inventor One Given Name:: Kyoji  
Family Name:: KATO  
Name Suffix::  
City of Residence:: Kitasaku-gun  
State or Prov. of Residence::  
Country of Residence:: Japan  
Inventor Two Given Name::  
Family Name::  
Name Suffix::  
City of Residence::  
State or Prov. of Residence::  
Country of Residence::  
Inventor Three Given Name::  
Family Name::  
Name Suffix::  
City of Residence::  
State or Prov. of Residence::  
Country of Residence::  
Inventor Four Given Name::  
Family Name::  
Name Suffix::  
City of Residence::  
State or Prov. of Residence::  
Country of Residence::  
Inventor Five Given Name ::  
Family Name::  
Name Suffix::  
City of Residence::  
State or Prov. of Residence::  
Country of Residence::

### **Correspondence Information**

Name Line One:: Oliff & Berridge PLC  
Address Line One:: P.O. Box 19928  
City:: Alexandria  
State or Province:: VA  
Postal or Zip Code:: 22320  
Telephone:: (703) 836-6400  
Fax:: (703) 836-2787  
Electronic Mail:: commcenter@oliff.com

### **Application Information**

Title Line One:: MOTOR  
Title Line Two::  
Title Line Three::  
Title Line Four::

## MOTOR

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates to a motor for driving a magnetic disk such as a spindle motor used in a hard disk drive of a computer.

#### 2. Description of the Related Art

Fig. 3 shows an example of a motor used in a hard disk drive. A magnet 5 in this motor 1 (magnetic disk drive motor) is provided with a rotor 4 so as to face an armature 3 provided on a stator 2. A ball bearing 6 for rotatably supporting the rotor 4 to the stator 2 is provided radially inward in positional relation with the magnet 5 and armature 3. And, a fitting portion 8 fitted in a hole (disk fitting hole 7a) of a magnetic disk 7 for supporting the magnetic disk 7 is provided in the rotor 4.

The stator 2 mainly consists of a substantially disc-shaped base 9 and the armature 3 held by the base 9. The base 9 mainly consists of a substantially disk-shaped base body 11 having a hole (base hole) 10 in its central portion, a cylindrical member (base cylinder body 12) provided upright from an inner circumferential portion of the base hole 10 and a flange (base flange 13) extending in the same direction as the base cylinder body 12 from the circumferential portion of the base body 11 with its edge portion extending radially outward from the base body 11. An inner diameter of the base cylinder body 12 is set at dimension A, and an outer diameter thereof is set at dimension B.

The armature 3 comprises a stator stack 3a held by the base cylinder body 12 and a coil 3b wound around this stator stack 3a, and is disposed in a space between the base cylinder body 12 and the base flange 13.

The rotor 4 mainly consists of a shaft (rotor shaft 14) having a diameter d, a main body of substantially disk-shaped rotor (hereinafter referred to as a hub 15) fitted to and held by the rotor shaft 14 and the magnet 5 held by the hub 15. The hub 15 mainly comprises a substantially disk-shaped hub body portion 16 (fitting

portion) having dimension E and inserted into the disk fitting hole 7a of the magnetic disk 7 for holding the disk 7, a flange (hub flange 17) provided upright at the outer circumferential portion of the hub body portion 16 and an outer diameter F of an annular extension 18 extending to project outward from the outer circumferential portion of the hub flange 17. The outer circumferential portion of the hub body portion 16 corresponds to the fitting portion 8. The magnet 5 is held inside the hub flange 17. When the rotor 4 is assembled in the stator 2, the magnet 5 faces the armature 3, and the magnet 5 and the armature 3 are disposed inside of the hub flange 17 and the hub 15.

A sleeve-like outer race 6a of the ball bearing 6 is held in the base cylinder body 12 of the stator 2, and a first sleeve-like inner race 6b is held by the rotor shaft 14. A proximal end side (on the side of the rotor 4) of the rotor shaft 14 projects radially outward and also serves as a second inner race 6c of the ball bearing 6. The inner race of the ball bearing 6 comprises a first inner race 6b and a second inner race 6c. A pair of seal plates 19 is provided at upper and lower ends of the outer race 6a. Reference numeral 20 in Fig. 3 denotes a printed circuit board, and the printed circuit board 20 and the coil 3b are connected to each other through a lead wire 21. Reference numeral 22 in Fig. 3 denotes a cap for covering the base hole 10 of the base body 11.

Then, this motor 1 rotates the magnetic disk 7 so that the read and write of data of the magnetic disk 7 may be performed with a magnetic head (not shown).

And now, the motor 1 (magnetic disk drive motor) is desirable to be light in weight, thin in thickness and hence small in size.

On the other hand, when the motor 1 receives a mechanical shock from outside, the shock is concentrated on the rotor 4, more specifically, onto the ball bearing 6 supporting the rotor 4, so that the ball bearing 6 is threatened to be damaged. And, in case the ball bearing 6 is damaged, the rotational speed of the magnetic disk 7 is decreased, that is, the reading and writing operation is threatened for an inaccurate performance or generation of a noise

and vibration.

For preventing the ball bearing 6 from being damaged, it may be sufficient that a bearing of, for example, a large size and high mechanical strength is used. However, since the diameter of the disk fitting hole 7a of the magnetic disk 7 is standardized by a predetermined length and the outer diameter of the hub 15 (hub body portion 16) is determined by the diameter of the disk fitting hole 7a, the diameter of the magnet 5 or the stator 2 provided inside the hub 15 is also limited. For this reason, the size of the bearing to be requested as large is limited.

For reference, in order to apply the large sized bearing, there is an approach to decrease the dimension in the radial direction of the armature 3 or the magnet 5 for offsetting the dimension of the diameter of the bearing to be increased. However, in this case, obtaining a desired rotational torque or a rotational velocity is threatened.

Therefore, in the prior art mentioned above, it has been difficult to adopt the approach of the large sized bearing to solve problems (causing an inaccuracy of reading and writing magnetic data or generating a noise or vibration) caused by the shock from the outside.

Also, the motor for the magnetic disk drive has been recently developed for use in a high-speed condition, and it is also desired to perform a low frictional operation to save the energy consumption even in the high-speed rotation mode of the motor.

#### SUMMARY OF THE INVENTION

The present invention has been made in the light of the above problems, an object of the present invention is to provide a motor that may attain an enhanced shock resistance without reducing a rotational torque and speed and also may reduce power consumption while performing a low frictional operation.

According to a first aspect of the present invention, a motor in which a magnet is provided on a rotor for facing an armature provided on a stator, a bearing for supporting a rotation of the

rotor relative to the stator is provided radially inward for the arrangement of the magnet and the armature, and a fitting portion to be inserted into a hole of a magnetic disk for supporting the magnetic disk is provided on the rotor, is characterized by that the bearing is of a fluid type of bearing and the magnet is provided radially outward comparing to the fitting portion.

According to a second aspect of the present invention, in the first aspect, an outer race of the bearing is formed in connection with the rotor.

According to a third aspect of the present invention, in the first aspect, an inner race of the bearing is formed in connection with the rotor.

#### BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

Fig. 1 is a cross-sectional view showing a motor in accordance with a first embodiment of the present invention;

Fig. 2 is a cross-sectional view showing a motor in accordance with a second embodiment of the present invention; and

Fig. 3 is a cross-sectional view showing an example of a conventional motor.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A motor according to a first embodiment of the present invention will be described with reference to Fig. 1.

In this motor 1A, a magnet 5 is provided so as to face to an armature 3 provided on a stator 2. A fluid bearing 40 using oil for rotationally supporting the rotor 4 to the stator 2 is provided radially inward at the disposing portion of the magnet 5 and armature 3. And, a fitting portion 8 to be inserted into a fitting hole 7a of a magnetic disk 7, by which the magnetic disk 7 is supported, is provided on the rotor 4.

The stator 2 mainly consists of a substantially disk-like base 9 and an armature 3 supported on the base 9 at a predetermined gap kept between the armature 3 and the magnet 5. The base 9 mainly

consists of a substantially disk-like base body 11 with a boss portion 30 projecting from the central portion thereof, a cylindrical portion (base cylinder body 12) provided upright at a predetermined distance from the boss portion 30 of the base body 11, a flange (base flange 13) projecting in the same direction as that of the base cylinder body 12 from a circumferential edge portion of the base body 11, and a stator side shaft member 31 fitted around and supported on the boss portion 30. The armature 3 is held on the outer circumferential side of the base cylinder body 12.

The rotor 4 comprises a substantially disk-like rotor body (hub 15) with a hole (rotor hole 32) in the central portion thereof and a magnet 5 held on this hub 15. The hub 15 comprises a substantially disk-like hub body portion 16, a cylindrical portion (rotor cylinder portion 33) provided vertically at the inner circumferential edge portion of the rotor hole 32 and inserted into the inner space of the base cylinder body 12, a fitting portion 8 formed to be projected from the surface opposite to the rotor sleeve portion 33 in the hub body portion 16 and inserted into the disk fitting hole 7a of the magnetic disk 7 for holding the magnetic disk 7 with a diameter dimension E, and a flange (hub flange 17) formed on the outer circumferential portion of the hub body portion 16. The diameter dimension of the hub body portion 16 is set to be greater than the diameter dimension of the fitting portion 8.

The hub flange 17 mainly consists of a hub flange extension portion 34 extending radially outward from the outer circumferential portion of the hub body portion 16 by a predetermined length and a substantially annular hub flange vertical wall portion 35 suspending from the peripheral edge portion of the hub flange extension portion 34. A gap having a predetermined width is formed between the armature 3 and the inner circumferential side of the hub flange vertical wall portion 35 to hold the magnet 5. In this case, the diameter dimension of the hub body portion 16 is greater than that of the fitting portion 8, and the hub flange extension portion 34 is provided on the hub body portion 16. The magnet 5 is disposed radially outward to the fitting portion 8. An annular

thrust plate 41 is provided between the rotor cylinder portion 33 and the stator 2 as well as between the base cylinder body 12 and the stator shaft member 31.

Reference numeral 37 in Fig. 1 designates a cap for covering the rotor hole 32 of the hub 15.

The fluid bearing 40 is mainly consisted so that the rotor hole 32 formed on the hub 15 is used for the outer race 40a, the stator shaft member 31 as inner race 40b, and that the fill oil liquid (fluid) is filled into the space created by the rotor hole 32 portion, stator shaft member 31, the thrust plate 41 and the cup 37.

In the first embodiment structured as described above, the magnet 5 is disposed radially outward to the fitting portion 8 so that the armature 3 to be arranged to face to the magnet 5 may be disposed more radially outward. As a result, a larger space may be kept for the arrangement of the fluid bearing 40 to be provided radially inward to the armature 3. Accordingly, a large sized fluid bearing 40 may be used.

Thus, the large sized fluid bearing 40 is used so that the fluid bearing 40 may ensure a higher mechanical strength. Even if the motor 1A receives a mechanical shock from the outside, and the shock is concentrated on the fluid bearing 40, it is possible to prevent the fluid bearing 40 from being damaged. For this reason, the fear of the reduction in the rotational speed of the magnetic disk 7, the decrease of accuracy for reading and writing magnetic data and the generation of noise or vibration all caused by the damage of the bearing can be avoided.

Also, when the fluid bearing 40 is used, even if the motor is rotated at a high rotational speed, there is a small friction, which may reduce the power consumption. Furthermore, the generation of vibrations has lessened compared with the roller bearing, the accuracy of the writing and reading operation of the magnetic data is enhanced, the generation of noises can be more confidently suppressed, and hence the life of the fluid bearing 40, that is, the life of the motor 1A can be elongated.

Also, since the dimensions in the radial direction of the magnet 5 and armature 3 are not reduced in comparison with the conventional art, it is possible to obtain a desired rotational torque and rotational speed in the same manner as in the conventional art.

A second embodiment of the present invention will be described with reference to Fig. 2. In the motor 1A (Fig. 1) in accordance with the first embodiment, the outer race of the fluid bearing 40 is formed in connection with the rotor 4 so that the outer race of the fluid bearing 40 is adapted to be rotated. But, in a motor 1B shown in Fig. 2, the inner race of the fluid bearing 40 is formed in connection with the rotor 4 so that the rotor shaft 14 (inner race side) of the rotor 4 is adapted to be rotated. Incidentally, as described later, the arrangement where the magnet 5 is provided radially outward on the fitting portion 8 is in the same manner as in the first embodiment.

The stator 2 of the motor 1B in accordance with the second embodiment as shown in Fig. 2 is generally formed with a substantially disk-like base 9 and the armature 3 held by this base 9. The base 9 is essentially formed with a substantially disk-like base body 11 with a base hole 10 formed in its central portion, a base cylinder body 12 vertically provided at the circumferential edge portion of the base hole 10 of the base body 11, and a base flange 13 extending from the circumferential edge portion of the base body 11 in the same direction as that of the base cylinder body 12.

The armature 3 is formed with a stator stack 3a held by the base cylinder body 12 and a coil 3b wound around the stator stack 3a, and it is disposed between the base cylinder body 12 and the base flange 13.

The rotor 4 of the motor 1B is essentially formed with a rotor shaft 14 having a predetermined diameter dimension, a substantially disk-like hub 15 fitted into and held by the rotor shaft 14 having a radial dimension greater than the diameter dimension E of the fitting portion 8 of Fig. 3 and a magnet 5 held by the hub 15. The hub 15 is essentially formed with a substantially disk-like hub body portion 16, the fitting portion 8 formed to be projected toward

one surface side (on the upper side of Fig. 2) of the hub body portion 16, fitted into the disk fitting hole 7a of the magnetic disk 7 for holding the magnetic disk 7 and having a diameter dimension E and a hub flange 17 formed at the outer circumferential portion of the hub body 16.

The hub flange 17 is essentially formed with a hub flange extension portion 34 extending radially outward from the outer circumferential portion of the hub body portion 16 by a predetermined length and a substantially annular hub flange vertical wall portion 35 suspending from the peripheral edge portion of the hub flange extension portion 34. A gap having a predetermined width is formed between the armature 3 and the inner circumferential side of the hub flange vertical wall portion 35 to hold the magnet 5. In this case, the diameter dimension of the hub flange 17 is greater than that of the fitting portion 8 as described above. The magnet 5 to be held by the hub flange vertical wall portion 35 is adapted to be disposed radially outward to the fitting portion 8.

The fluid bearing 40 is essentially formed with a sleeve-like outer race 40a provided on the inner circumferential side of the base cylinder body 12 and held by the stator 2, an inner ring 40b formed by the rotor shaft 14, a thrust plate 42 held by the base body 11 for covering the base hole 10 of the base body 11 and simultaneously supporting the movement of the rotor shaft 14 in the thrust direction, and a seal member 43 interposed between the hub 15 and the outer race 40a to face the thrust plate 42.

Also, in the thus constructed second embodiment, in the same manner as in the first embodiment, the magnet 5 is disposed radially outward to the fitting portion 8, and, to that extent, the armature 3 disposed in opposite to the magnet 5 may become possible to dispose more radially outward. As a result, a larger space may be kept for the arrangement of the fluid bearing 40 to be disposed radially inward to the armature 3. And, a larger sized fluid bearing 40 may become possible to be used.

Thus, the fluid bearing 40 having a larger size may ensure a higher mechanical strength, and even if the motor 1 receives a

mechanical shock from the outside and the shock is concentrated on the fluid bearing 40, it may become possible to prevent the fluid bearing 40 from being damaged. Due to this reason, the fear of the reduction in the rotational speed of the magnetic disk 7, the decrease of accuracy for reading and writing magnetic data and the generation of a noise or vibration all caused by the damage of the bearing can be avoided.

Also, by using such a larger sized fluid bearing 40, even if the motor is rotated at a high rotational speed, the friction is small, to that extent, the power consumption may be reduced. Furthermore, the generation of vibrations is lessened compared with the rolling bearing, the accuracy of the writing and reading operation of the magnetic data is enhanced, the generation of noises is more surely suppressed, and hence it becomes possible to elongate the service life of the fluid bearing 40, that is, the life of the motor 1.

Also, since the dimensions in the radial direction of the armature 3 and the magnet 5 are not lessened in comparison with the conventional art, it becomes possible to obtain a desired rotational torque and speed in the same manner as in the conventional art.

Although the fluid bearing 40 using oil is exemplified in the first and second embodiments, a fluid bearing using air instead of the oil or using an oil impregnated bearing (self-lubricative bearing) is possible.

Also, although in the foregoing respective embodiments, a case where the magnet and the armature are arranged to face each other in the radial direction is exemplified, it is possible, instead, to apply the present invention to a motor in which the magnet and the armature are held in the confronting surface portion of the rotor and the stator, respectively, and the magnet and the armature are arranged to face each other in the axial direction.

According to the first to the third aspects of the present invention, the magnet is disposed radially outward to the fitting portion, and, to that extent, the armature to be arranged to face

the magnet may be disposed more radially outward. Therefore, a larger space may be kept for the arrangement of the fluid bearing to be disposed radially inward to the armature, so that it becomes possible to use the fluid bearing having a larger size. As a result, by using the large sized fluid bearing, the fluid bearing may ensure a higher mechanical strength, and even if the motor receives a mechanical shock from the outside and the shock is concentrated on the fluid bearing, it becomes possible to prevent the fluid bearing from being damaged. For this reason, the fear of the reduction in the rotational speed of the magnetic disk, the decrease of the accuracy of reading and writing magnetic data and the generation of a noise or vibration all caused by the damage of the bearing can be avoided.

In addition, enhancement of shock-proof characteristic can be attained without reducing the dimension of the radial direction of the magnet and the armature. Thus, the desired rotational torque and speed necessary for this motor can be ensured.

Also, the fluid bearing is used so that even if the motor is rotated at a high rotational speed, there is a small friction, which may reduce the power consumption. Furthermore, the generation of vibration has lessened compared with the rolling bearing, the accuracy of the writing and reading operation of the magnetic data is enhanced, the generation of noises is suppressed, and hence it is possible to elongate the service life of the fluid bearing, that is, the life of the motor.

WHAT IS CLAIMED IS:

1. A motor in which a magnet is provided to a rotor so as to face an armature provided on a stator, a bearing for supporting rotation of the rotor relative to the stator is provided radially inward of the arrangement of the magnet and the armature, and a fitting portion inserted into a hole of a magnetic disk for supporting the magnetic disk is provided to the rotor, wherein the bearing is a fluid bearing and the magnet is disposed radially outward of the fitting portion.

2. The motor according to claim 1, wherein an outer race of the bearing is formed in connection with the rotor.

3. The motor according to claim 1, wherein an inner race of the bearing is formed in connection with the rotor.

#### ABSTRACT OF THE DISCLOSURE

A magnet 5 is disposed radially outward to a fitting portion 8. Thereby, an armature 3 to be disposed so as to face the magnet 5 may be arranged radially outward. It is possible to keep a large space for the arrangement of a fluid bearing to be disposed radially inward to the armature, and, as a result, the fluid bearing having a large size may be used. The large sized fluid bearing 40 is used for keeping a high mechanical strength, avoiding a fear that the fluid bearing 40 would be damaged when it receives a shock, and also avoiding the reduction in rotational speed of the magnetic disk 7, the degradation of accuracy in the writing and reading operation of magnetic data and the generation of a noise or a vibration. The fluid bearing 40 is used to reduce a friction even if the motor is rotated at a high speed, which may reduce the power consumption.

Representative drawing: Fig. 1

Fig. 1

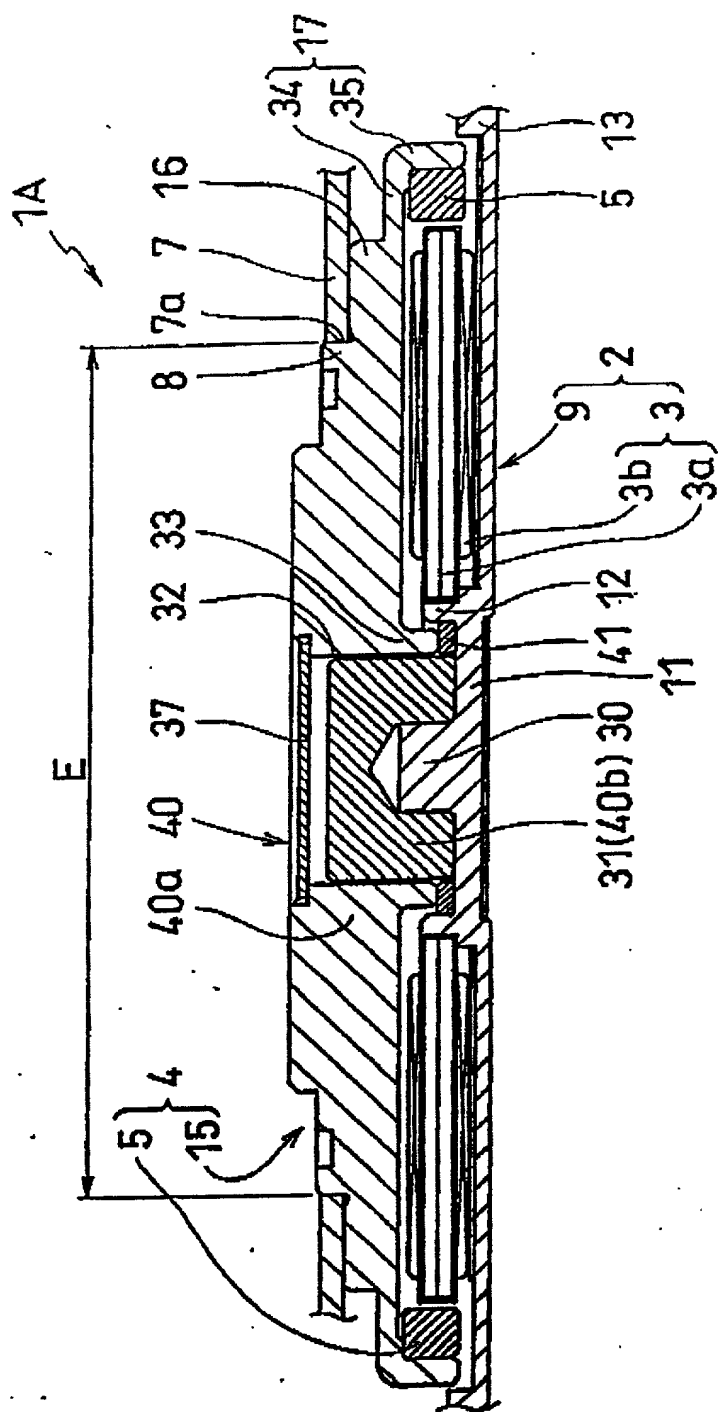


Fig. 2


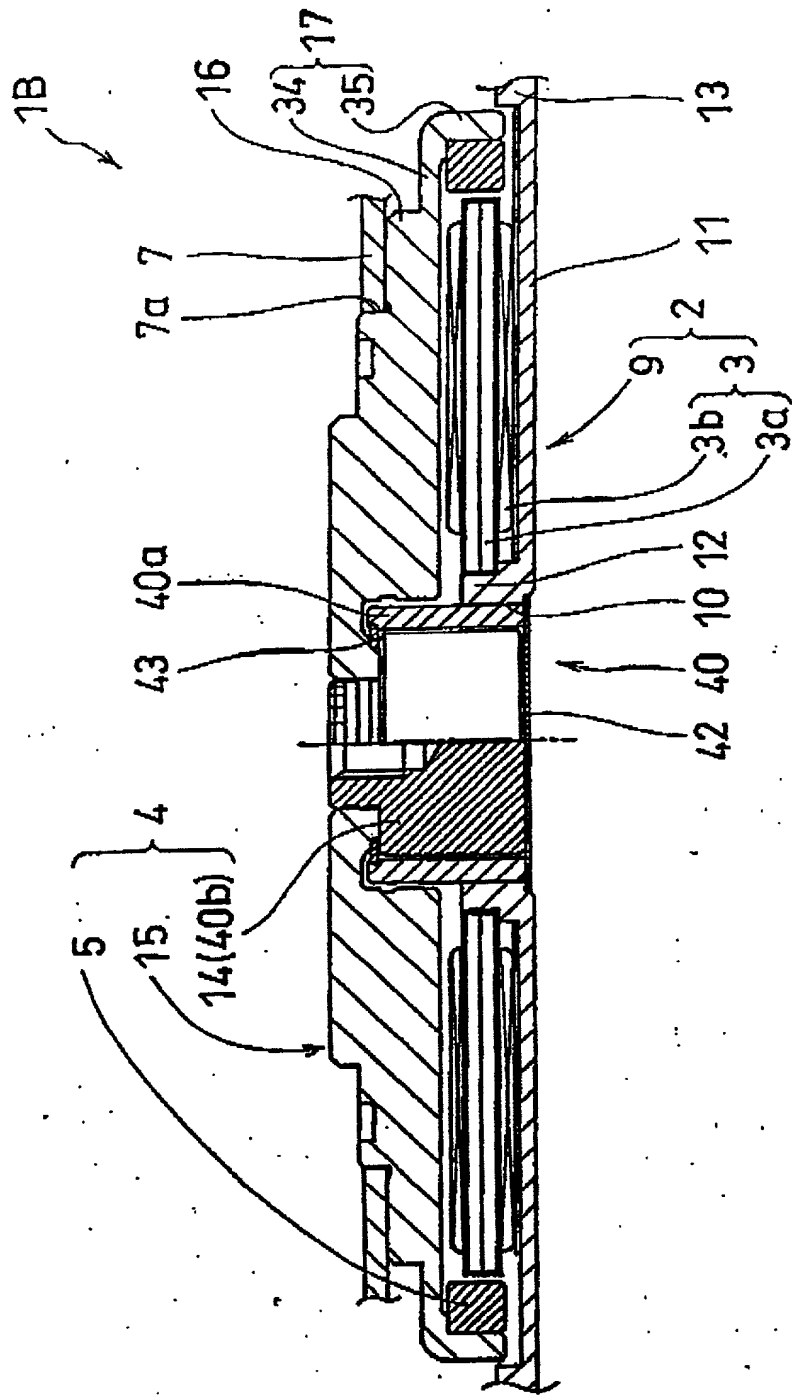


Fig. 3 Prior Art

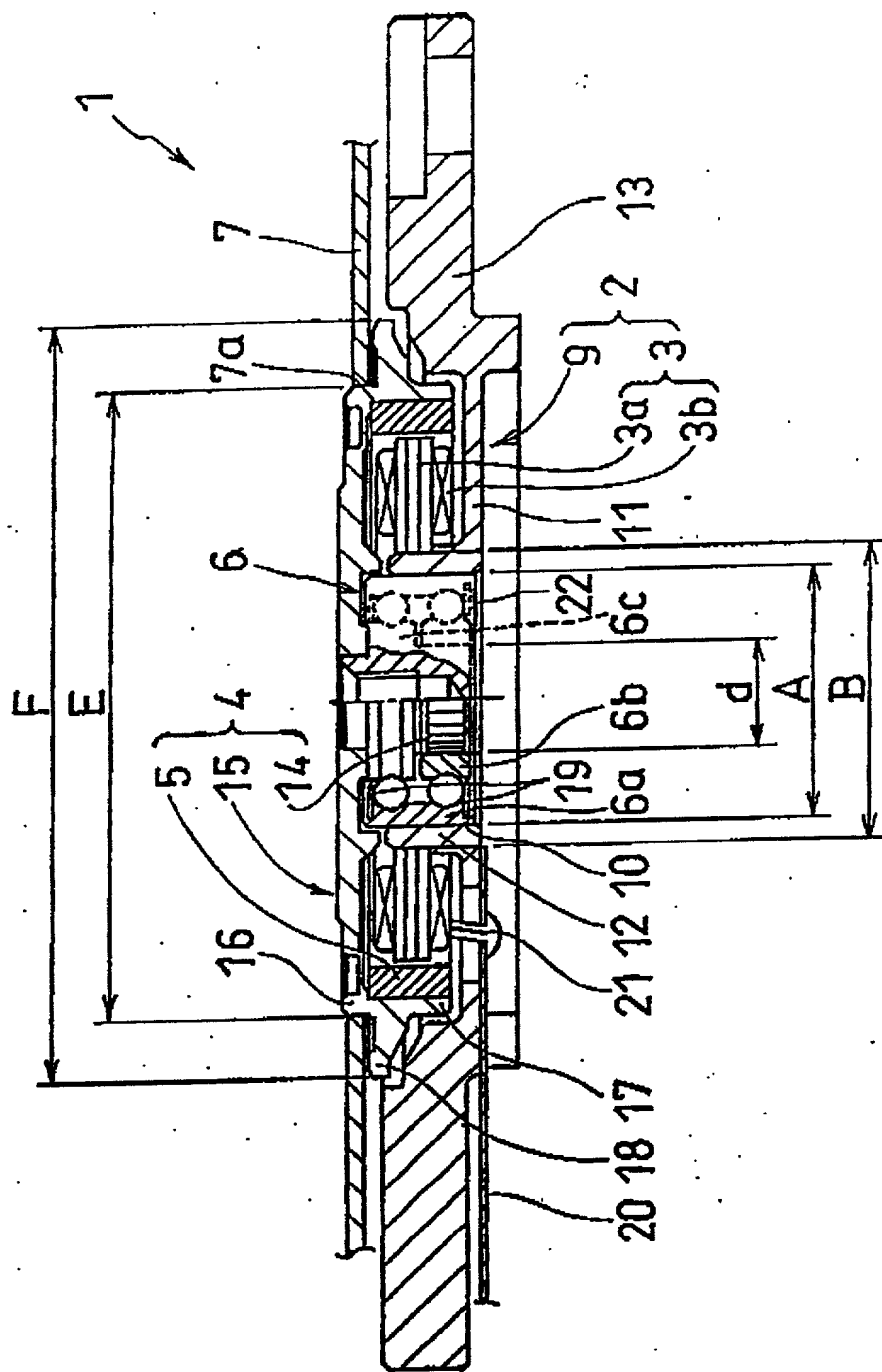

# APPLICATION FOR UNITED STATES PATENT DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**MOTOR**

described and claimed in the specification:

Check one

\*a. ☒ attached hereto.

b. ☐ filed on \_\_\_\_\_ as Application No. \_\_\_\_\_ and amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56. Under Title 35, U.S. Code §119, the priority benefits of the following foreign application(s) and/or United States provisional application(s) filed within one year prior to this application are hereby claimed:

Japanese Patent Application No. 2000-072127 filed on March 15, 2000

The following application(s) for patent or inventor's certificate on this invention were filed in countries foreign to the United States of America either (a) more than one year prior to this application, or (b) before the filing date of the above-named foreign priority application(s) and/or United States provisional application(s):

I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent Office:

James A. Oliff, Reg.No.27,076; William P. Berridge, Reg.No.30,024; Kirk M. Hudson, Reg.No.27,582;

Thomas J. Pardini, Reg.No.30,411; and Edward P. Walker, Reg.No.31,450.

ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO OLIFF & HERRIDGE, P.O. BOX 19928, ALEXANDRIA, VIRGINIA, 22220, TELEPHONE (703) 836-6400.

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Typewritten Full Name  
of Sole or First Inventor

Kyoji

Given Name

Middle Initial

KATO

Family Name

\*\*Inventor's Signature

KYOJI

\*\* Date of Signature

July

14

2000

Month

Day

Year

Residence

Kitasaku-gun

Nagano-ken

Japan

City

State or Province

Country

Citizenship

Japanese

Post Office Address

c/o Minebea Co., Ltd. Karuizawa Manufacturing Unit

(Insert complete mailing

4106-78 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, Japan

address, including country)

\*This form may be executed only when attached to the specification (including claims) at the end thereof if Box a. is checked.

\*\*Note to Inventor: Please sign name exactly as it appears above and insert actual date of signing.

IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE ☐